

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : <b>H04Q</b>		<b>A2</b>	(11) International Publication Number: <b>WO 00/01168</b>
			(43) International Publication Date: 6 January 2000 (06.01.00)
(21) International Application Number: PCT/US99/14623		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 25 June 1999 (25.06.99)			
(30) Priority Data: 09/105,905 26 June 1998 (26.06.98) US 09/232,069 14 January 1999 (14.01.99) US			
(71) Applicant: GTE LABORATORIES INCORPORATED [US/US]; 1209 Orange Street, Wilmington, DE 19801 (US).			
(72) Inventors: GERSHT, Alexander; 321 Marlborough Street, #4F, Boston, MA 02116 (US). PATHAK, Girish; 104 Marlboro Road, Sudbury, MA 01776 (US). SHULMAN, Alexander; 44 Drabbington Way, Weston, MA 02493 (US).			
(74) Agents: ANDERSON, Floyd, E. et al.; GTE Service Corporation, 600 Hidden Ridge, MC HQE03G13, Irving, TX 75038 (US).			
		<p><b>Published</b></p> <p><i>Without international search report and to be republished upon receipt of that report.</i></p>	

(54) Title: METHOD AND SYSTEM FOR BURST CONGESTION CONTROL IN AN ATM NETWORK

(57) Abstract

A method and system for controlling congestion in an ATM network (160) comprises the steps of pre-allocating, for a pre-determined interval of time, a set of burst access parameters to a set of pre-allocated virtual paths between a set of source node (100a-100c) and destination node (100a-100c) pairs in the ATM network (160), and controlling, at the burst level, the traffic at each source node based on the pre-allocated set of burst access parameters and without communicating with other nodes in the ATM network (160). Specifically, the network (160), for a pre-determined interval of time, pre-allocates a set of virtual paths between each source-destination node (100a-100c) pair in the network

(160), pre-allocates a set of maximum permitted rates to the pre-allocated set of virtual paths, respectively, and pre-assigns a set of burst access thresholds to a set of service classes, respectively, in the pre-allocated virtual paths, where the pre-assigned burst access thresholds are less than or equal to the corresponding pre-allocated maximum permitted rates. Based on the maximum permitted rates and the burst access thresholds, each source node (100a-100c) in the network (160) then controls, at the burst level, the traffic directed to the source node without communicating with other nodes (100a-100c) in the network (160). A source node (100a-100c) admits a detected burst onto a pre-allocated virtual path when a total reserved peak cell rate for all bursts that are in progress in the pre-allocated virtual path plus a peak cell rate of the detected burst is less than the identified burst access threshold. Otherwise, the source node (100a-100c) rejects the detected burst from the network (160).

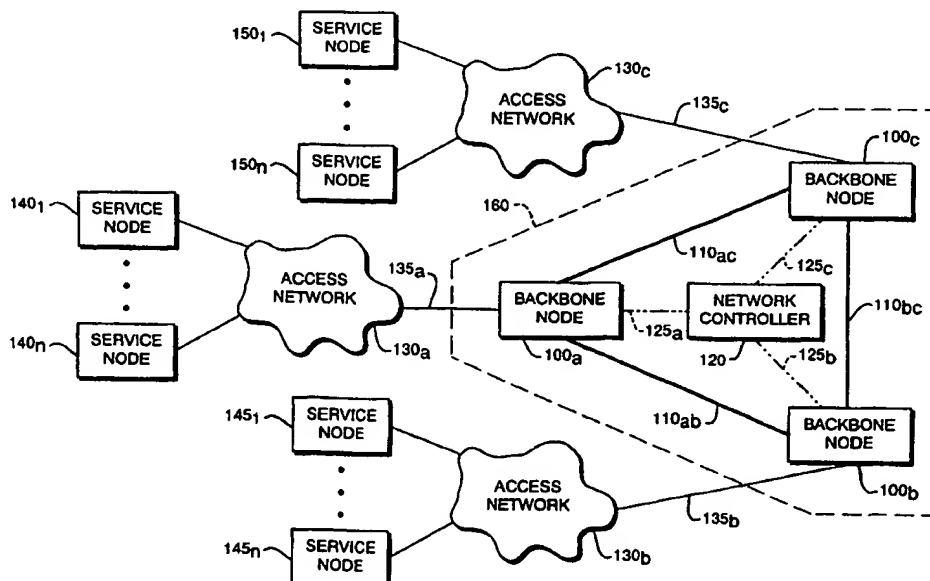

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## METHOD AND SYSTEM FOR BURST CONGESTION CONTROL IN AN ATM NETWORK

5

### Technical Field

The present invention relates to Asynchronous Transfer Mode (ATM) networks, and more particularly, to methods and systems for congestion avoidance in ATM backbone networks.

10

### Background Art

15

A communications network generally includes a plurality of nodes interconnected by transmission links (or "links"), which are defined by a specific bandwidth (or capacity). In an ATM network, a source node transmits data in the form of fixed sized cells to a destination node through a connection (referred to as a virtual circuit), which is established between the source node and the destination node. The virtual circuit may traverse zero or more nodes (i.e., switches) between the source node and the destination node. A group of virtual circuits between the source node and the destination node is referred to as a virtual path. The cells may include any type of digitized information, including audio, computer data, video, multimedia, Internet data, etc.

20

In an ATM backbone network, source nodes receive traffic from one or more external access networks. To control congestion in the network, the network uses a Connection Admission Control (CAC) method to determine the resources that are required to satisfy the quality of service (QoS) requirements of the virtual circuit associated with the traffic, and if the determined resources are available, to reserve the resources for that virtual circuit.

25

When a source node receives traffic from an external access network, the source node negotiates a traffic contract with the network, where the traffic contract includes

the necessary information for determining the required resources to establish a virtual circuit in the network. Specifically, the traffic contract includes a traffic descriptor and QoS requirements. The traffic descriptor further includes a source traffic descriptor and a cell delay variation tolerance (CDVT). The parameters of the source traffic descriptor are typically peak cell rate (PCR), average or sustainable cell rate (SCR), and the maximum burst sizes (MBS).

Generally, the existing ATM networks use a variety of proprietary methods (known as the equivalent bandwidth methods) to determine the amount of bandwidth that the networks must reserve in order to satisfy the QoS requirements of the virtual circuits associated with the traffic. Once a network determines the required bandwidth, the network then determines if a virtual path in the network has sufficient bandwidth to accommodate the virtual circuit. If the network identifies such a virtual path, the network reserves the determined bandwidth on the links that support the virtual path. If the network cannot identify such a virtual path, the network rejects the traffic.

An ATM network typically reserves the required bandwidth for the entire duration of a virtual circuit associated with a traffic stream. Because the duration of a virtual circuit is substantially longer than the sum of the durations of the individual bursts in the traffic stream, the virtual circuit does not use the reserved bandwidth during the silent periods between bursts, and thus, resulting in an inefficient use of bandwidth for bursty traffic.

One known solution to the inefficient use of bandwidth for bursty traffic is to reserve the required bandwidth only for the duration of the individual bursts instead of the duration of the virtual circuit. Specifically, ITU-T Rec. I.371, "Traffic Control And Congestion Control In B-ISDN," Perth, U.K. November 6-14, 1995, discloses a burst level reservation method known as the ABT method. In this method, the block of cells in each burst is enclosed by special management cells (referred to as RM cells), which identify the beginning and the end of each burst, respectively. An RM cell identifies the

bandwidth that is required to transport the burst within the network.

There are two types of ABT methods namely, ABT with delay transmission (ABT/DT) and ABT with immediate transmission (ABT/IT). In a network that uses the ABT/DT method, when a source node receives a burst from an external access network, the source node sends an RM cell to the ATM network, requesting permission to admit the burst into the network. The source node then waits for an admission or a rejection notification from the network. The network determines whether it has the required bandwidth available to satisfy the QoS of the virtual circuit associated with the burst, and if so, the network reserves the required bandwidth for that virtual circuit and sends an admission notification to the source node. When the source node receives the admission notification, the source node admits the burst into the network. However, if the network determines that it does not have the required bandwidth available, the network sends a rejection notification to the source node.

In a network that uses the ABT/IT method, when a source node receives a burst from an external access network, the source node immediately admits the burst into the network without reserving the required bandwidth to transport the burst in the network. As a result, after admitting the burst into the network, if any link associated with the virtual circuit of the admitted burst does not have the required bandwidth available to transport the burst, the network discards the burst.

One disadvantage of the ABT/DT method is that in wide area networks, due to long propagation delays between nodes in the network, the process of determining and reserving the required bandwidth for each burst can be prohibitively long compared to the duration of the individual bursts and the burst inter-arrival times. The ABT/IT method, on the other hand, may exacerbate congestion in an already congested network by admitting bursts into the network, when the network does not have the required bandwidth to transport the bursts.

Thus, it is desirable to have a method and system for addressing the above and

other disadvantages of the existing congestion control avoidance methods for bursty traffic in ATM networks.

### Disclosure of the Invention

5 Methods and systems consistent with the present invention control congestion in an ATM network by pre-allocating for a pre-determined interval of time a set of burst access parameters to a set of pre-allocated virtual paths between a set of source node and destination node pairs in the ATM network, and controlling, at the burst level, the traffic at each source node based on the pre-allocated set of burst access parameters and without communicating with other nodes in the ATM network. Specifically, the  
10 network pre-allocates, for a pre-determined interval of time, a set of virtual paths between each source-destination node pair in the network, pre-allocates a set of maximum permitted rates to the pre-allocated set of virtual paths, respectively, and pre-assigns a set of burst access thresholds to a set of service classes, respectively, in the pre-allocated virtual paths, where the pre-assigned burst access thresholds are less than  
15 or equal to the corresponding pre-allocated maximum permitted rates.

Each source node in the network then controls, at the burst level, the traffic directed to the source node based on the pre-allocated set of maximum permitted rates and the pre-assigned set of burst access thresholds and without communicating with other nodes in the network. Specifically, each source node detects the beginning of a  
20 burst in the traffic that is directed to that source node. From among the pre-allocated set of virtual paths between the source-destination node pair, the source node identifies a pre-allocated virtual path associated with the detected burst. The source node then identifies the service class of the detected burst, and the burst access threshold that corresponds to the identified service class. The source node admits the detected burst  
25 onto the identified pre-allocated virtual path when a total reserved peak cell rate for all bursts that are in progress in the identified pre-allocated virtual path plus a peak cell rate of the detected burst is less than the identified burst access threshold. Otherwise, the

source node rejects the detected burst from the network.

Methods and systems consistent with the present invention provide a facility for engineering a set of burst access parameters, subject to network capacity, burst rejection quality of service requirements, and conservation flow constraints, such that a total weighted rate of burst rejections in a network is minimized. Specifically, the network computes a set of maximum permitted rates for each pre-allocated virtual path in the network. Based on the computed maximum permitted rates, the network computes estimated offered loads associated with each service class in each pre-allocated virtual path. Furthermore, based on the computed set of maximum permitted rates and the computed set of estimated offered loads, the network computes a set of burst access thresholds.

The summary and the following description of the invention should not restrict the scope of the claimed invention. Both provide examples and explanations to enable others to practice the invention. The accompanying drawings, which form part of the description of the invention, show several embodiments of the invention, and together with the description, explain the principles of the invention.

#### **Brief Description of the Drawings**

Figure 1 is a block diagram of an ATM backbone network in accordance with an embodiment of the invention;

Figure 2 is a block diagram of a network controller and a burst level controller in an ATM backbone network in accordance with an embodiment of the invention;

Figure 3 is a flow chart of the steps that a network controller performs in accordance with an embodiment of the invention;

Figure 4 is a flow chart of the steps that a network controller performs to compute burst access parameters in accordance with an embodiment of the invention; and

Figure 5 is a flow chart of the steps that a burst level controller performs to control bursty traffic in accordance with an embodiment of the invention.

### Best Mode for Carrying Out the Invention

The following description of embodiments of this invention refers to the accompanying drawings. Where appropriate, the same reference numbers in different drawings refer to the same or similar elements.

5           Methods and systems consistent with the present invention pre-allocate, for a pre-determined interval of time, a set of burst access parameters to a set of pre-allocated virtual paths between a set of source node and destination node pairs in the ATM network, and control, at the burst level, the traffic at each source node based on the pre-allocated set of burst access parameters and without communicating with other nodes in  
10           the ATM network. Specifically, a network controller, for a pre-determined interval of time, pre-allocates a set of virtual paths between each source-destination node pair in the network, pre-allocates a set of maximum permitted rates to the pre-allocated set of virtual paths, respectively, and pre-assigns a set of burst access thresholds to a set of service classes, respectively, in the pre-allocated virtual paths, where the pre-assigned  
15           burst access thresholds are less than or equal to the corresponding pre-allocated maximum permitted rates. The network controller may adjust the pre-allocated virtual paths, the maximum permitted rates, and the burst access thresholds in, for example, hourly intervals to adapt to changes in traffic demand.

          A burst controller in each source node then controls the traffic, at the burst level,  
20           based on the pre-allocated set of maximum permitted rates and the pre-assigned set of burst access thresholds and without communicating with other nodes in the network. Specifically, each burst controller detects the beginning of a burst in the traffic that is directed to a source node, identifies the pre-allocated virtual path associated with the detected burst, and identifies the service class of the detected burst and the burst access  
25           threshold that corresponds to the identified service class. If a total reserved peak cell rate for all bursts that are in progress in the identified pre-allocated virtual path plus a peak cell rate of the detected burst is less than the identified burst access threshold, the

burst controller admits the detected burst onto the identified pre-allocated virtual path. Otherwise, the burst controller rejects the detected burst from the network.

Methods and systems consistent with the present invention engineer a set of burst access parameters, subject to network capacity, burst rejection quality of service requirements, and conservation flow constraints, such that a total weighted rate of burst rejections in a network is minimized. Specifically, the network computes a set of maximum permitted rates for each pre-allocated virtual path in the network. Based on the computed maximum permitted rates, the network computes estimated loads associated with each service class in each pre-allocated virtual path. Furthermore, based on the computed set of maximum permitted rates and the computed set of estimated loads, the network computes a set of burst access thresholds.

A source node is defined herein as a node in an ATM network that receives traffic from external networks, for example an access network, and routes the traffic through zero or more nodes via a pre-allocated virtual path to a destination node in the ATM network. A destination node herein is defined as a node in an ATM network that receives traffic from one or more source nodes as defined herein, and routes the traffic to external networks, for example access networks, or end users. A burst is generally and broadly defined herein as a stream of consecutive cells in a traffic stream, where each cell is separated by a time interval that is statistically significantly shorter than the silent periods in the traffic stream. A bursty traffic stream may generally include one or more streams of consecutive cells.

Figure 1 is a block diagram of an ATM backbone network 160 in accordance with an embodiment of the invention. Network 160 comprises backbone nodes 100a-100c, network controller 120, transmission links (or "links") 110ab, 110ac, and 110ab, and links 125a-125c. Nodes 100a through 100c may include, for example, a backbone switch or backbone router.

Node 100a connects to nodes 100b and 100c via transmission links 110ab

and 110ac, respectively. Node 100b connects to node 100c via transmission link 110bc. Nodes 100a-100c connect to network controller 120 via links 125a-125c, respectively. Network controller 120 communicates information via links 125a-125c to nodes 100a-100c, respectively.

5           Nodes 100a-100c also connect to external access networks 130a-130c via transmission links 135a-135c, respectively. Access network 130a, 130b, and 130c connect to service nodes  $140_1$ - $140_N$ ,  $145_1$ - $145_N$ , and  $150_1$ - $150_N$ , respectively. Each of service nodes  $140_1$ - $140_N$ ,  $145_1$ - $145_N$ , and  $150_1$ - $150_N$  may include equipment, which generate traffic in form of, for example, voice, data, and/or video.

10           Figure 2 is a block diagram of network controller 120 and a burst level controller 200 in node 100a in accordance with an embodiment of the invention. Burst level controller 200 communicates with network controller 120 via link 125a. Similarly, nodes 100b and 100c may also include burst level controllers, which communicate with network controller 120 via links 125b and 125c, respectively.

15           As shown in Figure 2, burst level controller 200 receives traffic from access network 130a via link 135a. Burst level controller 200 then sends via link 125a (shown in Figure 1) burst identification data 220 to network controller 120, and receives via link 125a burst access parameters 230 from network controller 120. Burst identification data 220 may include, for example, the time when a burst begins, the time when the  
20           burst ends, the peak cell rate, service class, and the virtual path associated with the burst.

          Figure 3 is a flow chart of the steps that network controller 120 performs in accordance with an embodiment of the invention. Network controller 120 estimates the offered load and the burst parameters associated with each service class for each source-  
25           destination node pair in network 160 (step 300). The estimated offered load may include, for example, the average number of cells that are directed to network 160 from access networks 130a through 130c. For each service class, the estimated burst

parameters may include the mean duration of bursts and the peak cell rate of the bursts corresponding to the estimated offered load.

Network controller 120 also identifies the topology of network 160 and capacity (or bandwidth) of links 110ab, 110ac, and 110bc, and pre-allocates a set of virtual paths for each source-destination node pair in network 160 (step 310). Each pre-allocated virtual path may span one or more links. For example, network 160 may establish between source node 100a and destination node 100c a virtual path consisting of links 110ab and 110bs. Similarly, network 160 may establish between source node 100a and destination node 100c another virtual path consisting of link 110ac.

Network controller 120 identifies the QoS requirements associated with the estimated offered loads for each source-destination node pair (step 320). Network controller 120 computes a set of burst access parameters that meet the identified QoS requirements for each pre-allocated virtual path between the source-destination node pairs (step 330). Network controller 120 assigns the computed burst access parameters to each pre-allocated virtual path between the source-destination node pairs (step 340). Network controller 120 then distributes the assigned burst access parameters to each source node in network 160 (step 350).

Figure 4 is a flow chart of the steps that network controller performs 120 to compute a set of burst access parameters, subject to network capacity, quality of service burst rejection requirements, and conservation flow constraints, such that a total weighted rate of burst rejections in network 160 is minimized in accordance with an embodiment of the invention. Network controller 120 computes a total maximum permitted rate (MPR) for each source-destination node pair (step 400). Network controller 120 then computes a maximum permitted rate, for example in units of cells per second, for each pre-allocated virtual path between each source-destination node pair (step 410). Based on the computed maximum permitted rates in step 410, network controller 120 then computes an estimated offered load associated with each service

class in each pre-allocated virtual path (step 420). Based on the maximum permitted rates computed in step 410 and the estimated traffic loads computed in step 420, network controller 120 then computes a burst access threshold, for example in unit of cells per second, for each service class in each pre-allocated virtual path (step 430).

5           Network controller 120 also determines whether the burst access parameters computed in steps 400-430 need further refinement (step 440). If the computed burst access parameters require further refinement (step 460), then network controller 120 computes a new set of burst access parameters by repeating steps 400-430. If the  
10           computed burst access parameters do not require further refinement (step 450), then network controller 120 does not compute a new set of burst access parameters (step 470).

          Figure 5 is a flow chart of the steps that burst level controller 200 performs to control traffic at source node 100a in accordance with an embodiment of the invention. Burst level controller 200 detects the beginning of a newly arrived burst (step 500). For  
15           example, for connectionless traffic, burst controller 200 may detect the beginning of the burst from the existence of a token in the traffic stream. The service node that generates the traffic, for example a customer premise equipment (CPE), or the ATM Adaptation Layer (AAL) inserts the token in the bursty traffic. In the embodiment of Figure 1,  
20           service nodes 140<sub>1</sub> through 140<sub>N</sub> may insert the tokens in the traffic generated by each service node. Alternatively, the ATM Adaptation Layer in access network 130a may insert the tokens. The token must include the destination of the burst, peak cell rate of the burst, and the QoS parameters of the burst.

          For connection-oriented traffic, burst level controller 200 may detect the beginning of the burst from the arrival of a new cell on a virtual circuit. Alternatively,  
25           burst level controller 200 may detect the beginning of a cell from the existence of a token. However, for the connection-oriented traffic, the token does not need to include the destination of the burst, peak cell rate of the burst, and the QoS parameters of the

burst.

Burst level controller 200 identifies the pre-allocated virtual path (step 510), service class (step 520) and the peak cell rate (step 530) associated with the detected burst. Burst level controller 200 then determines whether the total reserved peak cell rate for all bursts in progress in the identified pre-allocated virtual path plus the peak cell rate of the detected burst is less than or equal to the burst access threshold of the identified service class (step 540). If burst level controller 200 determines that the total reserved peak cell rate for all bursts in progress in the identified pre-allocated virtual path plus the peak cell rate of the detected burst is not less than or equal to the burst access threshold of the identified service class (step 550), then burst level controller 200 rejects the burst from network 160 (step 560).

If burst level controller 200 determines that the total reserved peak cell rate for all bursts in progress in the identified pre-allocated virtual path plus the peak cell rate of the detected burst is less than or equal to the burst access threshold of the identified service class (step 570), then burst level controller 200 admits the detected burst onto the identified pre-allocated virtual path (step 580). Burst level controller 200 then reserves in the identified pre-allocated virtual path a bandwidth equal to the peak cell rate of the detected burst (step 590).

When burst level controller 200 detects the end of the detected burst, burst level controller 200 subtracts the peak cell rate of the detected burst from the total reserved peak cell rate for all bursts in progress in the identified pre-allocated virtual path. For connection-oriented traffic and connectionless traffic, burst controller 200 may detect the end of the burst from the existence of a token in the traffic stream. Alternatively, for connection-oriented traffic, burst controller 200 may detect the end of the burst when the silent period in the traffic stream exceeds a pre-determined threshold. A network operator may set this threshold in burst level controller 200 to be greater than or equal to the reverse of the burst peak cell rate.

## TRAFFIC MODEL

In accordance with an embodiment of the present invention, a traffic directed to network 160 may include bursts that are separated by silent time intervals, which are modeled in network controller 120 by a Poisson distribution. Specifically, the cells in each burst may be separated by time intervals that are statistically much shorter than the silent time intervals. Accordingly, the cell inter-arrival rate may be much smaller than the burst inter-arrival rate, and the probability that the cell inter-arrival time exceeds the average burst inter-arrival time may be small. Thus, the minimum cell inter-arrival time is limited by the reverse of the burst peak cell rate.

The number of cells in a burst (or the burst length) may be represented as a random variable  $L$ , which may have an infinite variance (i.e., heavy-tail property). A Poreto distribution is one example of a probability distribution with an infinite variance, which may be represented as follows:

$$P(L = n) = \frac{b}{n^{1+a}}$$

where  $1 > a > 0$ , and  $b$  is a normalized constant, such that

$$\sum_{n=1}^{\infty} \frac{b}{n^{1+a}} = 1$$

Parameter  $a$  may be represented as a monotonically decreasing function of the average burst length, which may be represented as follows:

$$\bar{L} = \sum_{n=1}^{\infty} \frac{b}{n^{1+a}}$$

Furthermore, in the case of traffic that includes multiple classes of service, parameter  $a$ ,  $b$ , and  $\bar{L}$  may be expressed as a function of service class  $k$  as follows:

$$a = a(k), b = b(k) \text{ and } \bar{L} = \bar{L}(k), \text{ where } k=1,2, \dots, K.$$

5

### BURST REJECTION PROBABILITIES

Network controller 120 computes the burst rejection probabilities in network 160 based on the following parameters:

10

$A(v, k)$  - estimated burst arrival rate of service class  $k$  at the source node of a source-destination node pair  $v$ , for example, source node 100a and destination node 100c;

$u(v)$  - estimated total load on the burst level offered to a source-destination node pair  $v$ ;

15

$u(v, k)$  - service class  $k$  estimated load offered on the burst level to source-destination node pair  $v$ ;

$u(v, k, s)$  - service class  $k$  estimated load on the burst level offered to a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ ;

20

$p(v, k, s)$  - fraction of class  $k$  bursts that arrive at the source node of a source-destination node pair  $v$  and are routed on a pre-allocated virtual path  $s$  between the source-destination node pair  $v$ , where  $\sum p(v, k, s) = 1$  for  $p(v, k, s) \geq 0$ ;

$B(v, k, s)$  - probability of rejection of a service class  $k$  burst from a pre-allocated virtual path  $s$  between source-destination node pair  $v$ ;

25

$d(k)$  - QoS requirement limiting the rejection rate of a service class  $k$  burst from a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ ;

$M(v, s)$  - maximum permitted rate for a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ ;

$q(v, k, s)$  - burst access threshold associated with service class  $k$ ,

where  $0 \leq q(v, k, s) \leq M(v, s)$ ;

$R(v, s)$  - total reserved peak cell rate for all bursts in progress in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ ;

5  $R(v, k, s)$  - service class  $k$  estimated load on the cell level offered on a pre-allocated virtual path  $s$  between source-destination node pair  $v$ ;

$F(R, v, s)$  - probability that  $R(v, s)$  equals  $R$ , where  $0 \leq R \leq M(v, s)$ ;

$T(k)$  - estimated mean burst duration;

$r(k)$  - peak cell rate of burst associated with service class  $k$ .

10

Network controller 120 estimates load  $u(v, k)$  offered to source-destination node pair  $v$  in terms of the burst arrival rate ( $A(v, k)$ ) of service class  $k$  at the source node of a source-destination node pair  $v$  and mean burst duration ( $T(k)$ ) as follows:

15

$$u(v, k) = A(v, k) T(k)$$

20

Similarly, network controller 120 estimates load  $u(v, k, s)$  offered on a pre-allocated virtual path  $s$  between a source-destination node pair  $v$  in terms of the burst arrival rate ( $A(v, k)$ ) of service class  $k$  at the source node of a source-destination node pair  $v$ , mean burst duration ( $T(k)$ ) and the fraction of class  $k$  bursts ( $p(v, k, s)$ ) that arrive at the source node of the source-destination node pair  $v$  and are routed on the pre-allocated virtual path  $s$  between the source-destination node pair  $v$  as follows:

25

$$u(v, k, s) = A(v, k) p(v, k, s) T(k) \quad (1)$$

$$\bar{R}(v, k, s) = u(v, k, s) r(k).$$

Network controller 120 computes the probability distribution of the total reserved peak cell rate for all bursts in progress in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ . In an embodiment where each  $q(v, k, s)$  is preset to  $M(v, s)$ , network controller 120 computes  $F(R, v, s)$  and  $B(v, k, s)$  using the following equations:

$$R F(R, v, s) = \sum u(v, k, s) r(k) F(R - r(k), v, s), \text{ where the sum is taken over all service classes } k = 1, \dots, K; \quad (2)$$

$$F(x, v, s) = 0, \text{ if } x < 0;$$

$$\sum F(R, v, s) = 1, \text{ where the sum is taken from } R = 0 \text{ to } M(v, s); \text{ and} \quad (3)$$

$$B(v, k, s) = \sum F(R, v, s), \text{ where the sum is taken from } R \text{ greater than } M(v, s) - r(k) \text{ to } M(v, s). \quad (4)$$

Network controller 120 then recursively solves equations (2) and (3) to determine based on equation (4) the probability of rejection ( $B(v, k, s)$ ) of a service class  $k$  burst from a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ .

In an embodiment where each  $q(v, k, s)$  is not preset to  $M(v, s)$ , network controller 120 computes  $F(R, v, s)$  and  $B(v, k, s)$  using, for example, the method disclosed in A. Gersht, K. J. Lee, "Virtual-Circuit Load Control In Fast Packet-Switch Broadband Networks," Proceedings of GLOBECOM '88, December 1988.

## BURST ACCESS PARAMETER ENGINEERING

In accordance with an embodiment of the present invention, network controller 120 computes the burst access parameters described in Figure 4 (steps 400-470) as follows: Network controller 120 computes the burst access parameters so that they satisfy the QoS burst rejection requirement ( $d(k)$ ) of each service class  $k$  in each pre-allocated virtual path  $s$  between each source-destination node pair  $v$  in network 160, such that a total weighted rate of burst rejections in network 160 is minimized for a

particular set of link capacities (or bandwidth) and QoS burst rejection requirements.

Network controller 120 computes the burst access parameters based on the following parameters:

- 5  $M_l$  - total maximum permitted rate assigned by network controller 120 to link  $l$ , for example link 110ab, where  $M_l = \sum M(v, s)$  with the sum taken over all pre-allocated virtual paths  $s$  on link  $l$ .
- $C_l$  - total capacity (or bandwidth) of link  $l$ ;
- $w(k)$  - weight assigned to service class  $k$  based on, for example, priority of
- 10 service class  $k$ ;
- $Q(v, s)$  - weighted rate of burst rejection on a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ ; and
- $Q$  - total weighted rate of burst rejections in network 160, where  $Q = \sum Q(v, s)$  with the sum taken over all pre-allocated virtual paths  $s$  between all source-
- 15 destination node pairs  $v$  in network 160.

To compute burst access parameters, network controller 120 uses the weighted rate of burst rejection  $Q(v, s)$  on a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ . The weighted rate of burst rejections  $Q(v, s)$  is defined as

20 follows:

$$Q(v, s) = \sum_{k \in K} A(v, k) p(v, k, s) B(v, k, s) w(k) \quad (5)$$

Network controller 120 then minimizes the total weighted rate of burst rejections

25  $Q$  over the parameters  $M(v, s)$ ,  $p(v, k, s)$ , and  $q(v, k, s)$ . Specifically, for a particular  $A(v, k)$ ,  $T(k)$ ,  $w(k)$ , network topology, link capacities, and a set of pre-allocated virtual paths, network controller 120 minimizes  $Q$  over  $M(v, s)$ ,  $p(v, k, s)$ , and  $q(v, k, s)$ , subject to the following constraints:

QoS burst rejection constraint:  $B(v, k, s) \leq d(k)$ ;

link capacity constraint:  $M_l \leq C_l$ ;

conservation flow constraint:  $\sum p(v, k, s) = 1, p(v, k, s) \geq 0$ ; and

burst access thresholds constraint:  $0 \leq q(v, k, s) \leq M(v, s)$ .

5

#### RELAXATION OF QoS BURST REJECTION CONSTRAINT

Network controller 120 uses a penalty function method to relax the QoS burst rejection constraint. Specifically, network controller 120 uses the penalty function  $G(v, k, s)$  for non-compliance with the QoS burst rejection constraint for service class  $k$  in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$  as follows:

10

$$G(v, k, s) = g\left(\frac{B(v, k, s)}{d(k)} - 1\right) \quad \text{if } B(v, k, s) \geq d(k),$$

15

and  $G(v, k, s) = 0$ , otherwise, (6)

where  $g$  is a positive multiplier that determines the strength of penalty for violating the QoS burst rejection constraint,  $B(v, k, s) \leq d(k)$ . Similarly, network controller 120 uses the penalty function  $G(v, s)$  for non-compliance with the QoS burst rejection constraint for all service classes in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$  as follows:

20

$$G(v, s) = \sum G(v, k, s), \text{ where the sum is taken from } k = 1 \text{ to } k = K.$$

25

Network controller 120 then represents a total weighted rate of burst rejections in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$  as follows:

$$Q^*(v, s) = Q(v, s) + G(v, s); \quad (7)$$

$G = \sum G(v, s)$ , where the sum is taken over all pre-allocated virtual paths  $s$  between all source-destination node pairs  $v$  in network 160;

$$Q^* = Q + G.$$

Then, network controller 120 minimizes  $Q^*$  subject to the following constraints:

link capacity constraint:  $M_i \leq C_i$ ;

conservation flow constraint:  $\sum p(v, k, s) = 1, p(v, k, s) \geq 0$ ; and

burst access thresholds constraint:  $0 \leq q(v, k, s) \leq M(v, s)$ .

In addition, network controller 120 decomposes the task of minimizing the total weighted rate of burst rejections  $Q^*$  into three related sub-tasks, which are as follows:

sub-task (1): compute,  $M(v, s)$ , the maximum permitted rates for each pre-allocated virtual path  $s$  between each source-destination pair  $v$ ;

sub-task (2): compute,  $p(v, k, s)$ , the fraction of class  $k$  bursts that arrive at the source node of a source-destination node pair  $v$  and are routed on a pre-allocated virtual path  $s$  between the source-destination node pair  $v$ ; and

sub-task (3): compute,  $q(v, k, s)$ , the burst access thresholds for each service class  $k$  in a pre-allocated virtual path  $s$  between a source-destination node pair  $v$ .

Network controller 120 performs sub-tasks (1) through (3) in a sequential fashion. For each sub-task, network controller 120 optimizes an objective function (as defined below) over each set of variables  $M'(v, s)$ ,  $p'(v, k, s)$ , and  $q'(v, k, s)$ , respectively, while keeping the other two sets of variables fixed, where  $t$  represents a particular iteration. For example, after completing an iteration  $t$  of sub-task (1), network controller 120 uses the computed  $M'(v, s)$  to compute  $p'(v, k, s)$ . Similarly, after completing an iteration  $t$  of sub-task (2), network controller 120 uses the computed  $M'(v,$

$s)$  and  $p'(v, k, s)$  to compute  $q'(v, k, s)$ . Network controller may, if needed, repeat sub-tasks (1) through (3) in order to refine each computed  $M'(v, s)$ ,  $p'(v, k, s)$ , and  $q'(v, k, s)$ .

#### SUB-TASK(1): COMPUTATION OF MAXIMUM PERMITTED RATES

5 Network controller 120 computes an estimate of  $M'(v)$ , the total maximum permitted rate for all pre-allocated virtual paths  $s$  between each source-destination node pair  $v$  in network 160, and assigns a maximum permitted rate,  $M'(v, s)$ , to each pre-allocated virtual path  $s$  between each source-destination node pair  $v$  such that the QoS burst rejection constraint,  $B'(v, k, s) \leq d(k)$ , and the link capacity constraint,  $M'_i \leq C_{i,j}$ , are  
 10 satisfied. Specifically, network controller 120 uses an iterative procedure to compute an estimate of  $M'(v)$  and assign each  $M'(v, s)$  to each pre-allocated virtual path  $s$ . At each iteration  $t$ , based on  $p^{t-1}(v, k, s)$ , and  $q^{t-1}(v, k, s)$ , which network controller 120 computes, at iteration  $t - 1$ , network controller 120 computes an estimated  $M'(v)$  for each source-destination node pair  $v$ , and assigns  $M'(v, s)$  to each pre-allocated virtual path  $s$  in  
 15 network 160.

Network controller 120 uses as initial estimate of  $M'(v)$  the following lower bound for  $M'(v)$ :

$$M(v) \geq \sum_{\forall s} \bar{R}(v, k, s)(1 - d(k)).$$

20 At an initial iteration  $t = 0$ , network controller 120 initializes  $M(v)$  as follows:

$M^0(v) = \sum R(v, k, s)(1 - d(k))$ , where the sum is taken over all service classes  $k = 1, \dots, K$ , and over all pre-allocated virtual paths  $s$  between source-destination node pair  $v$ ; and

25  $M^0(v) = \sum A(v, k)T(k)r(k)(1 - d(k))$ , where the sum is taken over all service classes  $k = 1, \dots, K$ .

Network controller 120 then computes an  $M'(v, s)$  for each pre-allocated virtual path between each source-destination node pair  $v$  as follows: Network controller 120 computes a  $M'(v, s)$  for each pre-allocated virtual path such that the maximal link virtual residual capacity,  $(C_l - M_l)$ , is minimized subject to  $\sum M'(v, s) = M'(v)$ , where the sum is taken over all pre-allocated virtual paths  $s$  in network 160 and  $0 \leq M'(v, s)$ . Network controller 120 computes each  $M'(v, s)$  by using a flow deviation method, for example, the flow deviation method disclosed in A. Gersht, A. Shulman, "Optimal Routing In Circuit-Switched Communication Networks," IEEE Transactions On Communications, Volume 37, No. 11, November 1989.

After the initial iteration at each iteration  $t$ , network controller 120 refines  $M'(v)$  based on  $M^{t-1}(v)$ , which network controller 120 computed at iteration  $t - 1$ , as follows:

$$M^t(v) = M^{t-1}(v) + b^{t-1}(v),$$

where  $b^t(v)$  is the step size by which network controller 120 increments  $M^t(v)$ , and  $b^0(v)$  equals 0. For  $t \geq 1$ , network controller 120 selects  $b^t(v)$  to be proportional to the maximum of  $(B(v, k, s)/d(k)) - I$ , which is computed at iteration  $t - 1$ , and where the maximum is taken over all service classes  $k = 1, \dots, K$  and over all pre-allocated virtual paths  $s$  between source-destination node pair  $v$ . These iterations continue until the QoS burst rejection constraint is satisfied for all classes in each pre-allocated virtual path  $s$  between each source-destination node pair  $v$ . Network controller 120 then modifies  $b^t(v)$  to decrease  $Q$  as long as the link capacity constraint,  $M_l \leq C_l$ , is satisfied.

## SUB-TASK(2): COMPUTATION OF LOAD ASSIGNMENTS

Network controller 120 computes  $p'(v, k, s)$ , the fraction of class  $k$  bursts that arrive at the source node of a source-destination node pair  $v$  and that are to be routed on a pre-allocated virtual path  $s$  between the source-destination node pair  $v$ , as follows:

Based on the set of pre-allocated virtual paths,  $A(v, k)$ ,  $T(k)$ ,  $r(k)$ ,  $w(k)$ , and  $M'(v, s)$  computed at iteration  $t$  and thresholds  $q^{t-1}(v, k, s)$  computed at iteration  $t - 1$ , network controller 120 computes each  $p(v, k, s)$  such that  $Q^*$  is minimized, subject to  $\sum p'(v, k, s) = 1$ , where  $p'(v, k, s) \geq 0$ . At initial iteration  $t = 0$ , network controller 120 computes the values of  $p'(v, k, s)$  that optimize  $Q^*$  for a given set of  $M'(v, s)$  and  $q^{t-1}(v, k, s)$  assuming that  $q^0(v, k, s)$  equals  $M^0(v, s)$ .

Network controller 120 then computes,  $L(v, k, s)$ , the length of a pre-allocated virtual path  $s$  between a source-destination node pair  $v$  for a service class  $k$ . Network controller 120 computes  $L(v, k, s)$  by taking a partial derivative of  $Q^*$  with respect to  $p(v, k, s)$ .

For any given  $M(v, s)$  and  $q(v, k, s)$  satisfying the burst access thresholds constraint,  $0 \leq q(v, k, s) \leq M(v, s)$ , network controller 120 computes a set of  $p(v, k, s)$  for each source-destination node pair  $v$  independently. Each computed  $p(v, k, s)$  has a positive value only when the corresponding pre-allocated virtual paths  $s$  has a minimum  $L(v, k, s)$ . From the computed  $p(v, k, s)$ , network controller 120 uniquely determines  $Q^*(v, s)$ , and thus,  $Q^*$ . If network controller 120 determines that  $G(v, s) = 0$ , then the QoS burst rejection constraint is satisfied. In other words,  $Q^*(v, s)$  equals  $Q(v, s)$ , and network controller 120 has computed, for a given set of  $M(v, s)$  and  $q(v, k, s)$ , the values of  $p(v, k, s)$  such that the total weighted rate of burst rejections  $Q$  is minimized subject to the QoS burst rejection constraint.

For each set of pre-allocated virtual paths  $s$ , network controller 120 computes the lengths,  $L(v, k, s)$ , by taking partial derivatives of  $Q^*(v, s)$  with respect to  $p(v, k, s)$ . Network controller 120 uses an iterative flow deviation method, subject to the link capacity constraint, to shift the offered load to pre-allocated virtual paths  $s$  that have minimum lengths.

From equations (4), (5), (6), and (7), network controller 120 may compute the length of each pre-allocated virtual path  $s$ ,  $L(v, k, s)$ , as follows:

$$L(v, k, s) = \frac{\partial Q^*(v, s)}{\partial p(v, k, s)}$$

$$= A(v, k) B(v, k, s) w(k) + \frac{\partial B(v, k, s)}{\partial p(v, k, s)} [A(v, k) p(v, k, s) w(k) + \frac{2g}{d(k)} Y(v, k, s)], \quad (8)$$

$$\text{where } Y(v, k, s) = \frac{B(v, k, s)}{d(k)} - 1, \text{ if } \frac{B(v, k, s)}{d(k)} \geq 1,$$

and 0, otherwise; and

5

$$\frac{\partial B(v, k, s)}{\partial p(v, k, s)} = \sum_{i=1}^{E-y \cdot \theta} \frac{\partial F(R, v, s)}{\partial p(v, k, s)}.$$

In an embodiment where each  $q(v, k, s)$  is preset to  $M(v, s)$  for all service classes  $k$  and pre-allocated virtual paths  $s$ , network controller 120 computes the derivatives

10  $Z(R, v, k, s) = \frac{\partial F(R, v, s)}{\partial p(v, k, s)}$  jointly with  $F(R, v, s)$  as follows: For  $R > 0$ , network controller

120 computes  $Z(R, v, k, s)$  based on equations (2) and (3) by taking partial derivatives from both sides of equation (2) and using equation (1):

$$RZ(R, v, k, s) = A(v, k)T(k)r(k)F(R-r(k), v, s) + \sum_{\vec{j}} u(v, l, s)r(l)Z(R - r(l), v, k, s) \quad (9)$$

15 Network controller 120 then takes the partial derivative of  $F(0, v, s)$  to compute  $Z(0, v, k, s)$  as follows:

$$Z(0, v, k, s) = -A(v, k)T(k)(1 - B(v, k, s))F(0, v, s) \quad (10)$$

20 In an embodiment where each  $q(v, k, s)$  is not preset to  $M(v, s)$  for all service

classes  $k$  and pre-allocated virtual paths  $s$ , network controller 120 computes  $F(R, v, s)$ , and thus,  $Z(R, v, k, s)$  using, for example, the method disclosed in A. Gersht, K. J. Lee, "Virtual-Circuit Load Control In Fast Packet-Switch Broadband Networks," Proceedings of GLOBECOM '88, December 1988.

5           Network controller 120 recursively solves equations (9) and (10) jointly with equations (2) and (3) independently for each service class by performing the following steps: (Network controller 120 uses  $L(v, k, s, i)$  and  $p(v, k, s, i)$  to represent the values of  $L(v, k, s)$  and  $p(v, k, s)$  on the  $i^{\text{th}}$  iteration, respectively.)

10           Step 0: Network controller 120 sets  $p(v, k, s, i)$  equal to  $(1/n(v))$ , where  $n(v)$  is the number of pre-allocated virtual paths  $s$  between a source-destination node pair  $v$ , and  $i = 0$ .

          Step 1: Network controller 120 computes  $L(v, k, s, i)$  from (8) through (10) using recursive equations (2) through (4) for  $p(v, k, s, i)$ .

15           Step 2: Network controller 120 computes  $L(v, k, s, i)$  using the equation  $p(v, k, s, i + 1) = (1 - \gamma(i))p(v, k, s, i) + \gamma(i)\delta(v, k, s, i)$ , where  $\gamma(i)$  represents the step size, and  $\delta(v, k, s, i)$  equals 1, if  $L(v, k, s, i)$  equals the minimum value of  $L(v, k, m, i)$ , where  $m$  is an index representing a pre-allocated virtual path  $s$  and the minimum is taken over all pre-allocated virtual paths  $m$ , and  $\delta(v, k, s, i)$  equals 0, otherwise.

20           Step 3: Network controller 120 repeats Steps 1 and 2 until the difference between the maximum length pre-allocated virtual path and the minimum length pre-allocated virtual path is less than  $\epsilon$ , where  $\epsilon$  is a predetermined parameter.

#### 25           SUB-TASK(3): COMPUTATION OF BURST ACCESS THRESHOLDS

          For a given set of  $M'(v, s)$ ,  $p'(v, k, s)$ , and  $u'(v, k, s)$ , network controller 120 computes a set of burst access thresholds,  $q'(v, k, s)$ , such that the total weighted rate of burst rejections  $Q^*$  is minimized over all  $q'(v, k, s)$  subject to the burst access threshold

constraint,  $0 < q'(v, k, s) \leq M'(v, s)$ . At each iteration  $t$ , based on the computed values of  $M'(v, s)$  and  $p'(v, k, s)$ , network controller 120 computes the values of  $q'(v, k, s)$  that minimize  $Q^*(v, s)$  independently and, for example, in parallel for all pre-allocated virtual paths  $s$ .

5           Network controller uses an optimization method, for example the method disclosed in A. Gersht, K. J. Lee, "Virtual-Circuit Load Control In Fast Packet-Switch Broadband Networks," Proceedings of GLOBECOM '88, December 1988, to compute the values of  $q'(v, k, s)$ .

10           While it has been illustrated and described what are at present considered to be preferred embodiments and methods of the present invention, it will be understood by those skilled in the art that various changes and modifications may be made, and equivalents may be substituted for elements thereof without departing from the true scope of the invention.

15           In addition, many modifications may be made to adapt a particular element, technique or implementation to the teachings of the present invention without departing from the central scope of the invention. Therefore, it is intended that this invention not be limited to the particular embodiments and methods disclosed herein, but that the invention include all embodiments falling within the scope of the appended claims.

**Claims:**

1. A congestion control method for a network, said method comprising the steps of:

5 allocating, for a pre-determined interval of time, a set of burst access parameters to a set of allocated virtual paths between a set of source node and destination node pairs in the network; and

controlling, at burst level, traffic at each source node in the network based on the allocated set of burst access parameters.

10 2. A congestion control method for a network, said method comprising the steps of:

allocating, for a pre-determined interval of time, a set of virtual paths between a set of source node and destination node pairs in the network;

15 allocating, for the pre-determined interval of time, a set of maximum permitted rates to the allocated set of virtual paths, respectively;

assigning, for the pre-determined interval of time, a set of burst access thresholds to a set of service classes, respectively, wherein the assigned burst access thresholds are less than or equal to the corresponding allocated maximum permitted rates; and

20 controlling, at burst level, traffic at each of the source nodes based on the allocated set of maximum permitted rates and the assigned set of burst access thresholds.

25 3. The method of claim 2, wherein the controlling step comprises the steps of:

detecting, at one of the source nodes, a beginning of a burst in the traffic;

identifying, from among the allocated set of virtual paths, the allocated virtual path corresponding to the detected burst;

identifying, from among the set of service classes, the service class corresponding to the detected burst;

5 identifying, from among the assigned set of burst access thresholds, the burst access threshold corresponding to the identified service class;

admitting the detected burst when the total reserved peak cell rate for all bursts that are in progress in the identified allocated virtual path plus a peak cell rate of the detected burst is less than or equal to the identified burst access threshold; and

10 rejecting the detected burst when the total reserved peak cell rate for all bursts that are in progress in the identified allocated virtual path plus a peak cell rate of the detected burst is greater than the identified burst access threshold.

4. The method of claim 3, wherein said admitting step further comprises the step of:

15 reserving, in the identified allocated virtual path, a bandwidth equal to the peak cell rate of the detected burst.

5. The method of claim 3 further comprising the step of:

20 releasing, in the identified allocated virtual path, the reserved bandwidth when detecting an end of the detected burst.

6. A method for determining a set of burst access parameters in a network, said method comprising the steps of:

25 computing a set of maximum permitted rates corresponding to a set of allocated virtual paths, respectively;

computing a set of estimated offered loads corresponding to a set of service classes in each allocated virtual path based on the computed maximum

permitted rates; and

computing a set of burst access thresholds based on the computed set of maximum permitted rates and the computed set of estimated offered loads such that a total weighted rate of burst rejections in the network is minimized subject to a network capacity constraint, a quality of service constraint, and conservation flow constraint.

7. A method for avoiding congestion in a network, said method comprising the steps of:

allocating, for a pre-determined interval of time, a set of virtual paths between a set of source node and destination node pairs in the network;

allocating, for the pre-determined interval of time, a set of maximum permitted rates to the allocated set of virtual paths, respectively; and

controlling, at burst level, traffic at each of the source nodes based on the allocated set of maximum permitted rates.

8. The method of claim 7, wherein the controlling step comprises the steps of:

detecting, at one of the source nodes, a beginning of a burst in the traffic;

identifying, from among the allocated set of virtual paths, the allocated virtual path corresponding to the detected burst;

admitting the detected burst when the total reserved peak cell rate for all bursts that are in progress in the identified allocated virtual path plus a peak cell rate of the detected burst is less than or equal to the maximum permitted rate of the identified allocated virtual path; and

rejecting the detected burst when the total reserved peak cell rate for all bursts that are in progress in the identified allocated virtual path plus a peak cell rate of the detected burst is greater than the maximum permitted rate of the identified allocated

virtual path.

9. The method of claim 8, wherein said admitting step further comprises the step of:

5                   reserving, in the identified allocated virtual path, a bandwidth equal to the peak cell rate of the detected burst.

10. The method of claim 8 further comprising the step of:  
                  releasing, in the identified allocated virtual path, the reserved  
10               bandwidth when detecting an end of the detected burst.

11. A system for controlling congestion in a network, said system comprising:  
                  a network controller for allocating, for a pre-determined interval of  
15               time, a set of burst access parameters to a set of allocated virtual paths between a set of source node and destination node pairs in the network; and  
                  a burst level controller for controlling, at burst level, traffic at each source node in the network based on the pre-allocated set of burst access parameters.

1/5

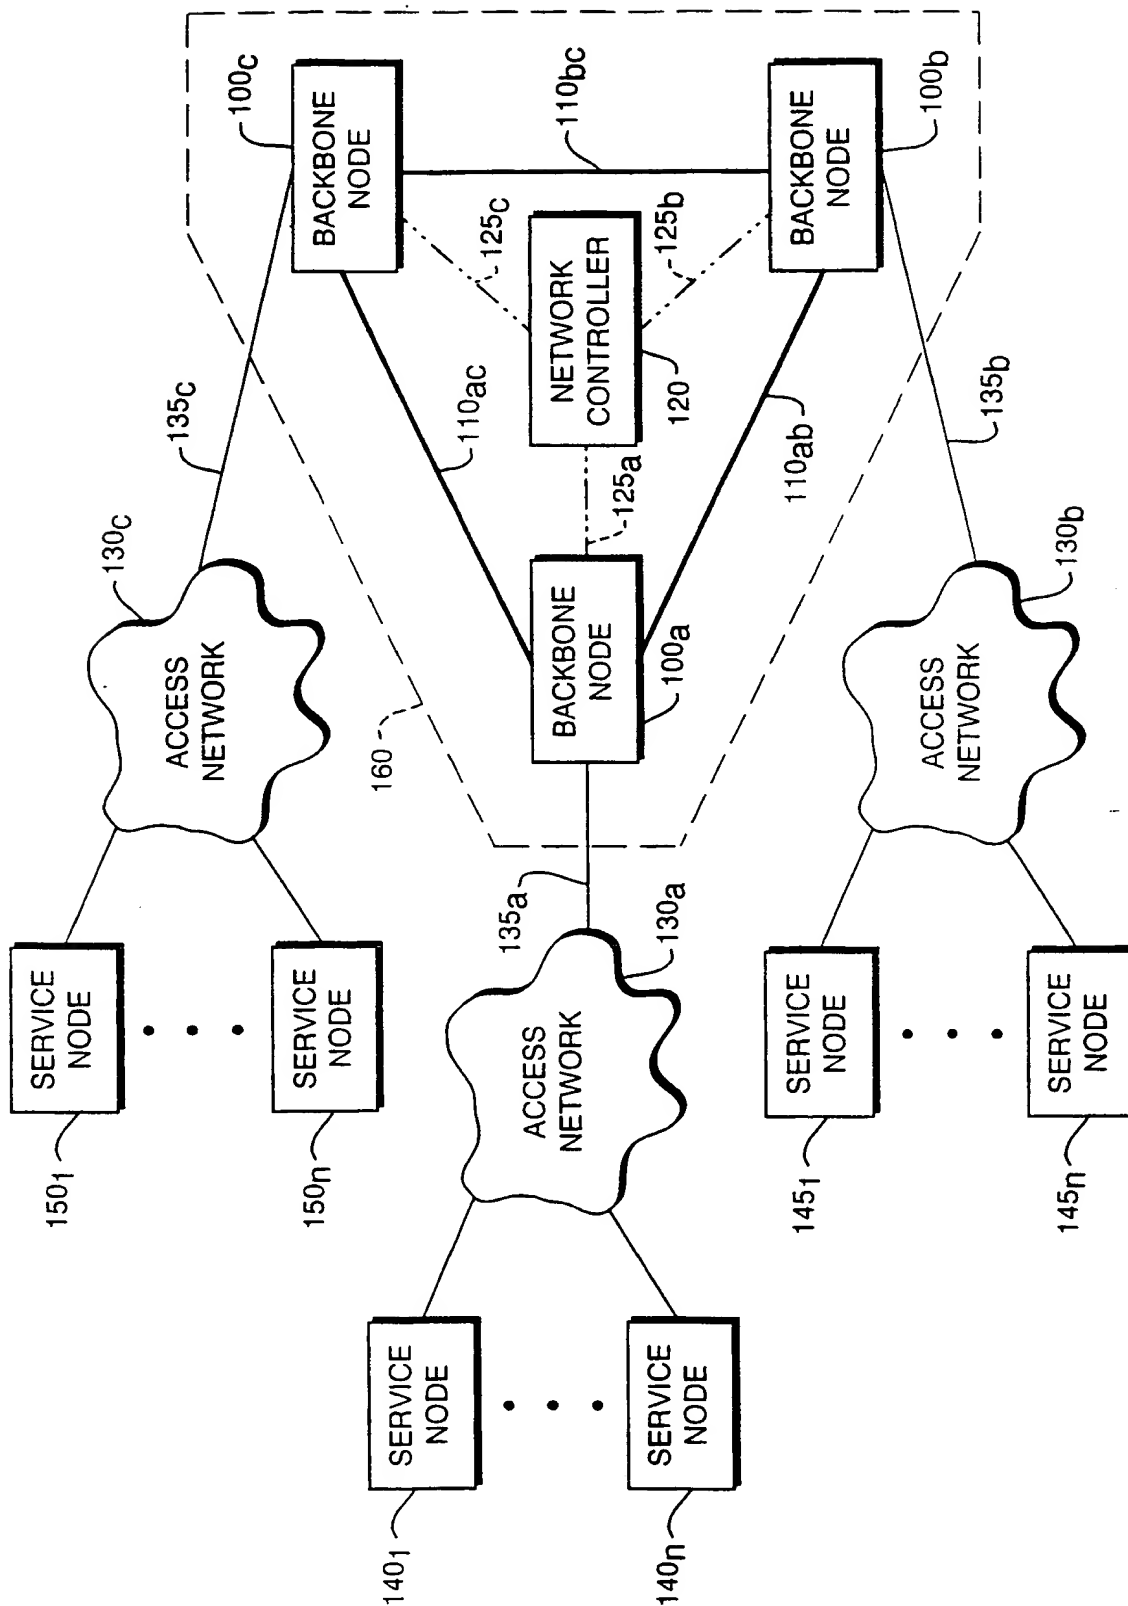


FIG. 1

2/5

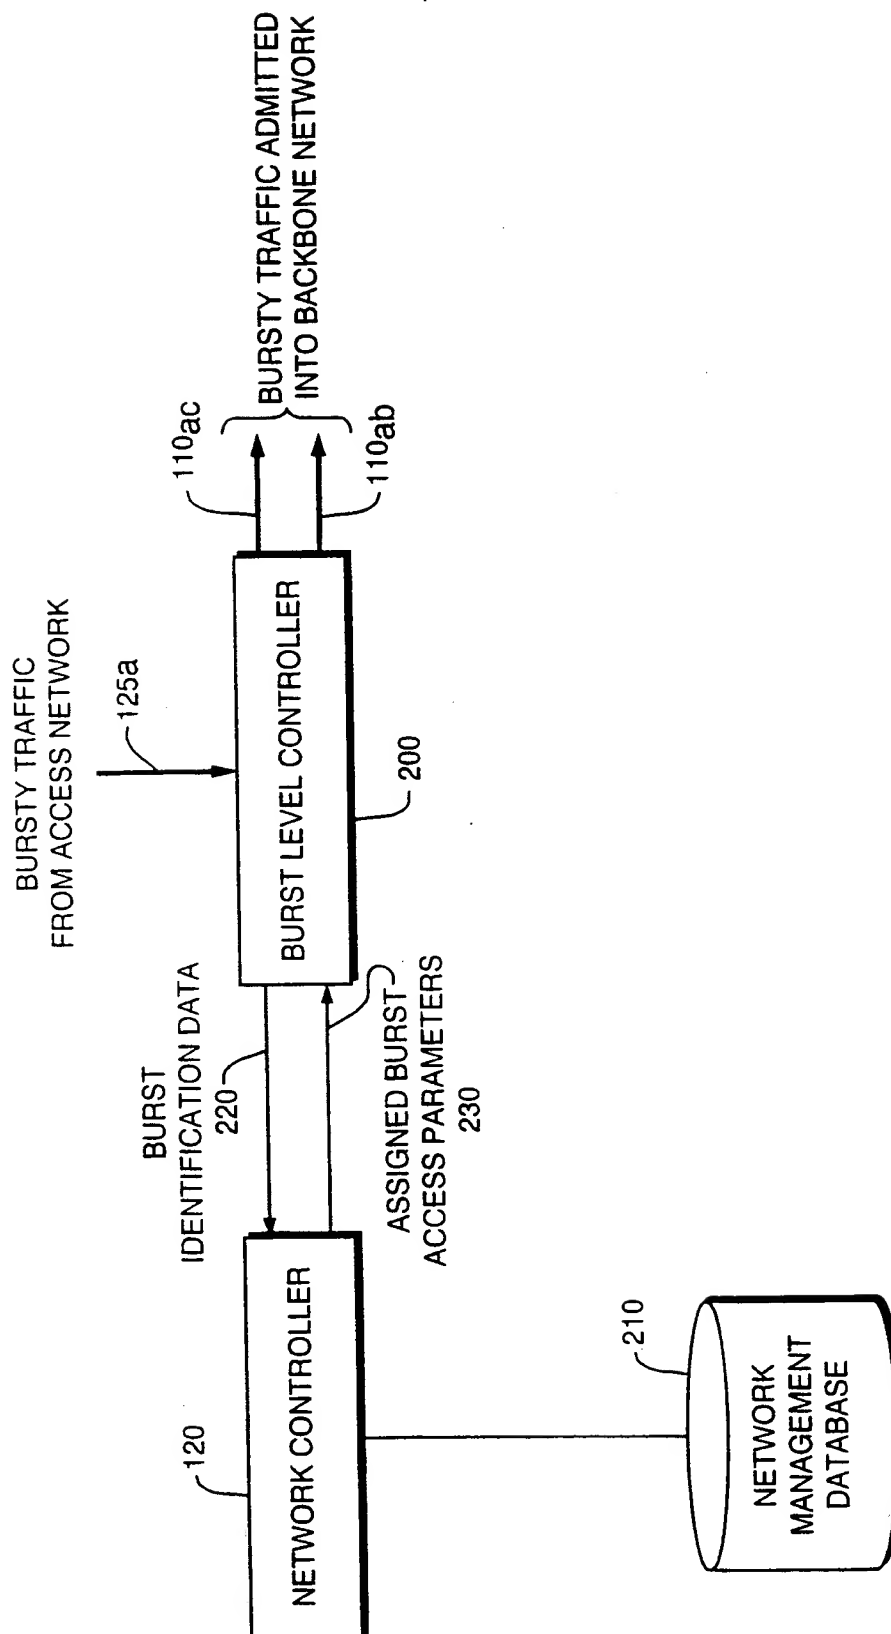


FIG. 2

3/5

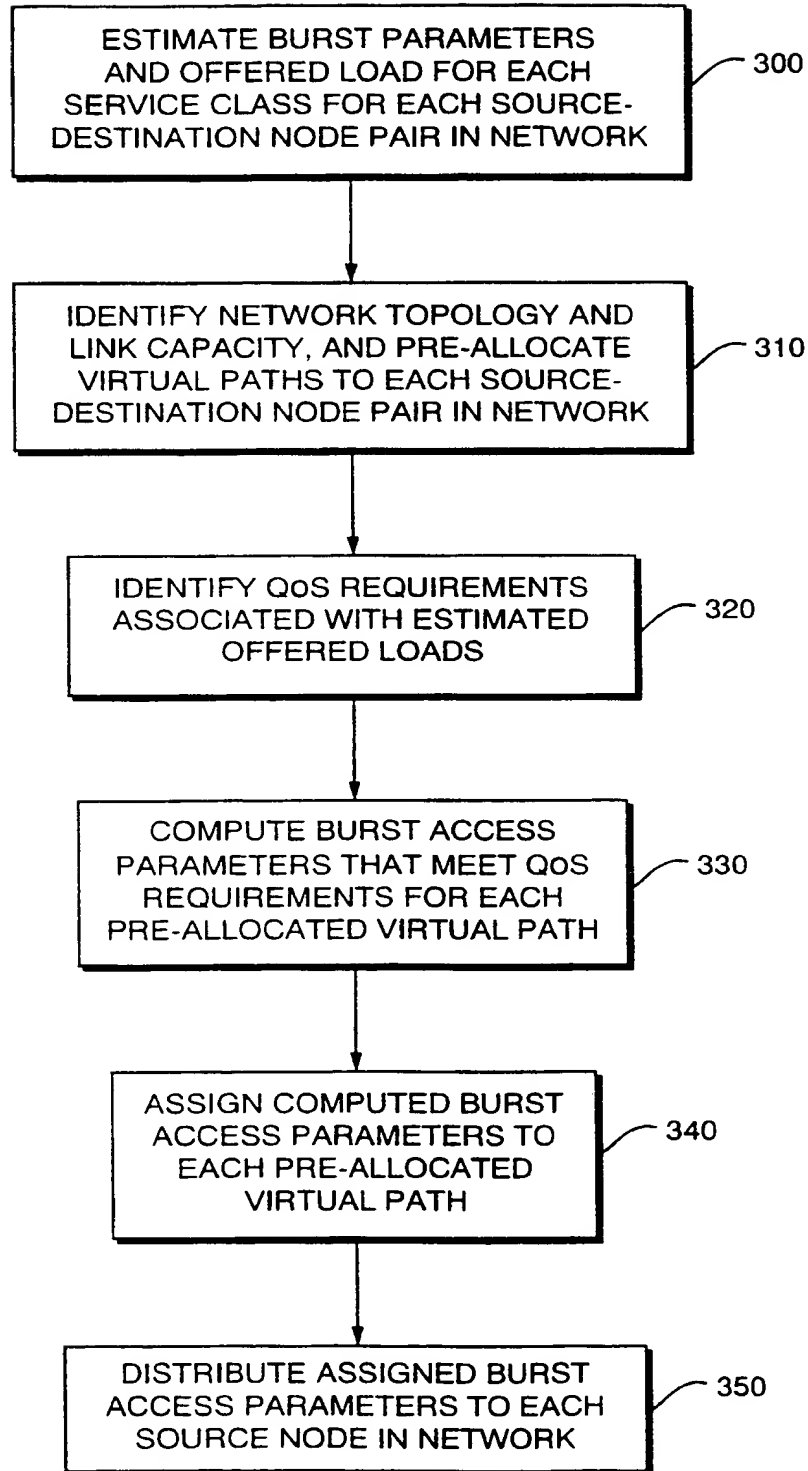


FIG. 3

SUBSTITUTE SHEET (RULE 26)

4/5

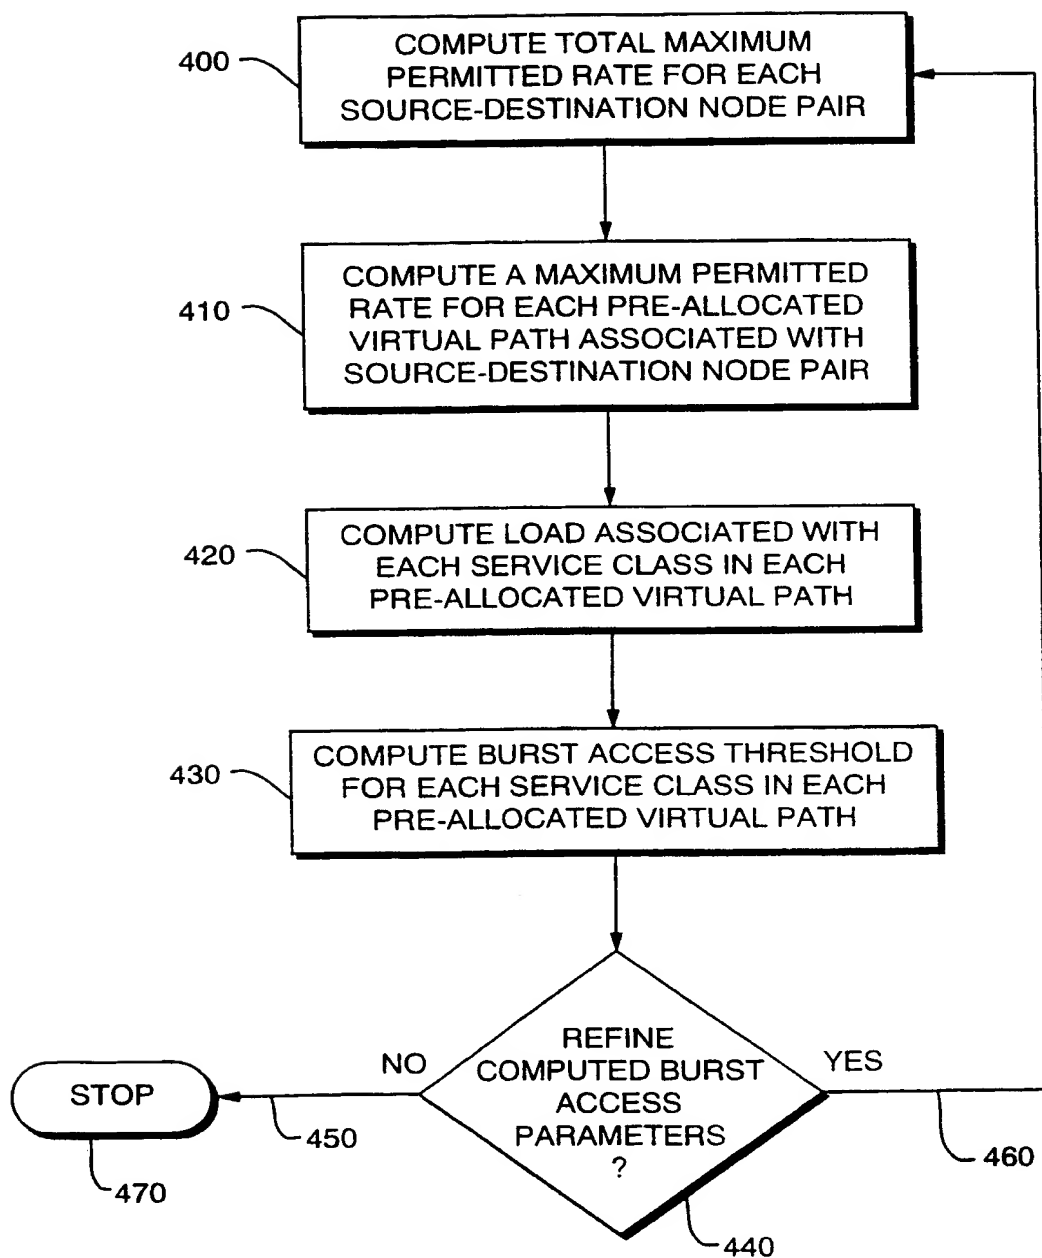


FIG. 4

5/5

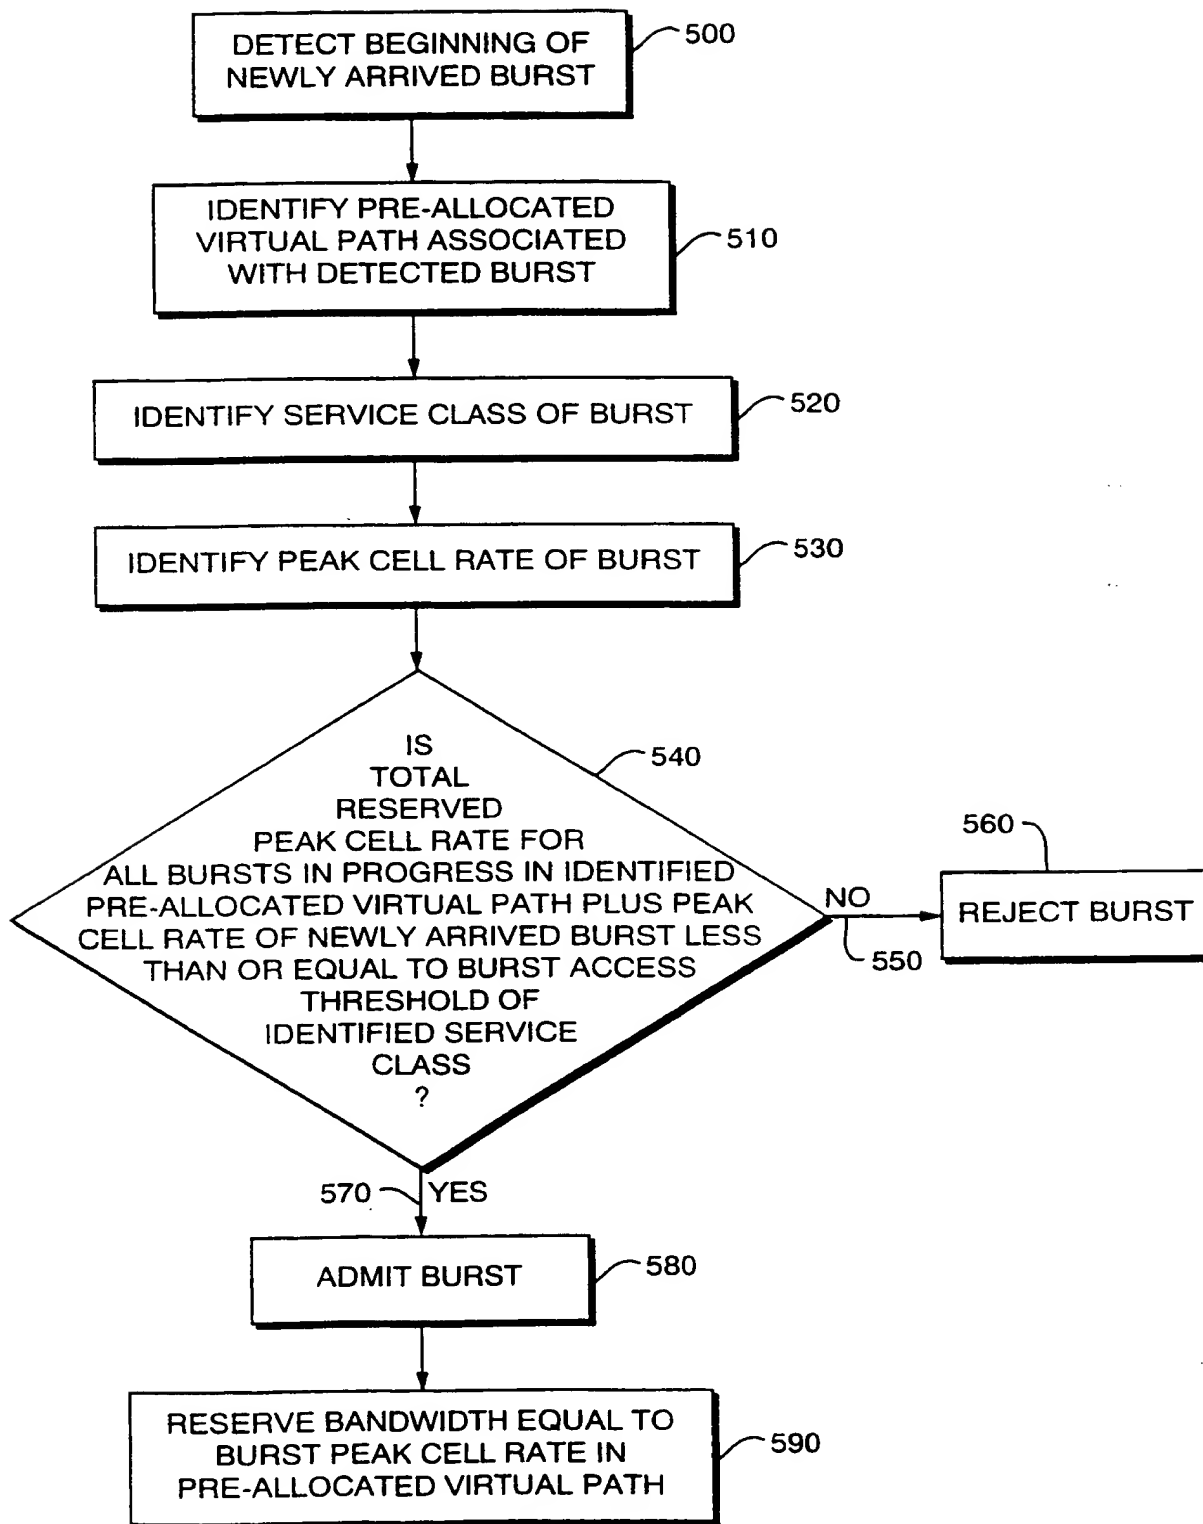


FIG. 5

SUBSTITUTE SHEET (RULE 26)


**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04J 3/14</b>		<b>A3</b>	(11) International Publication Number: <b>WO 00/01168</b>
			(43) International Publication Date: <b>6 January 2000 (06.01.00)</b>
(21) International Application Number: <b>PCT/US99/14623</b>		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: <b>25 June 1999 (25.06.99)</b>		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 09/105,905      26 June 1998 (26.06.98)      US 09/232,069      14 January 1999 (14.01.99)      US			
(71) Applicant: <b>GTE LABORATORIES INCORPORATED [US/US]; 1209 Orange Street, Wilmington, DE 19801 (US).</b>			
(72) Inventors: <b>GERSHT, Alexander; 321 Marlborough Street, #4F, Boston, MA 02116 (US). PATHAK, Girish; 104 Marlboro Road, Sudbury, MA 01776 (US). SHULMAN, Alexander; 44 Drabbington Way, Weston, MA 02493 (US).</b>			
(74) Agents: <b>ANDERSON, Floyd, E. et al.; GTE Service Corporation, 600 Hidden Ridge, MC HQE03G13, Irving, TX 75038 (US).</b>		(88) Date of publication of the international search report: <b>4 May 2000 (04.05.00)</b>	

(54) Title: METHOD AND SYSTEM FOR BURST CONGESTION CONTROL IN AN ATM NETWORK

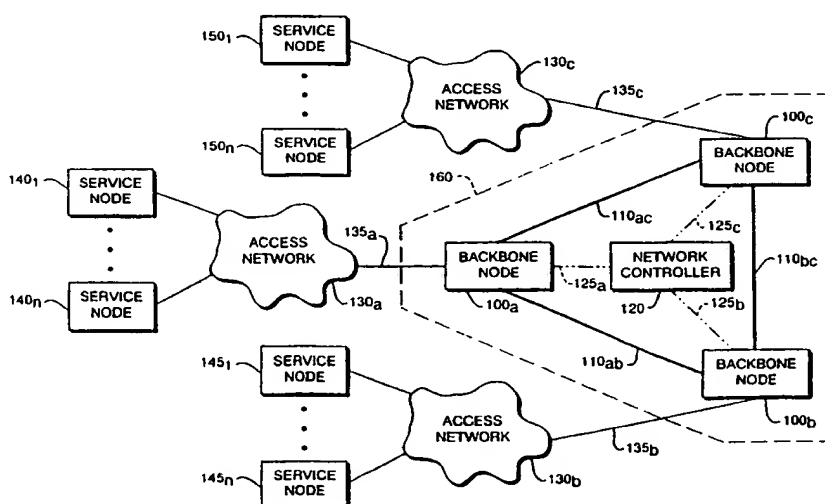

## (57) Abstract

A method and system for controlling congestion in an ATM network (160) comprises the steps of pre-allocating, for a pre-determined interval of time, a set of burst access parameters to a set of pre-allocated virtual paths between a set of source node (100a-100c) and destination node (100a-100c) pairs in the ATM network (160), and controlling, at the burst level, the traffic at each source node based on the pre-allocated set of burst parameters and without communicating with other nodes in the ATM network (160). Specifically, the network (160), for a pre-determined interval of time, pre-allocates a set of virtual paths between each source-destination node (100a-100c) pair in the network (160), pre-allocates a set of maximum permitted rates to the pre-allocated set of virtual paths, respectively, and pre-assigns a set of burst access thresholds to a set of service classes, respectively.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/14623

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :H04J 3/14

US CL :370/232

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/232, 229, 230, 231, 233, 234, 235, 236, 252, 253, 410

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,530,698 A (KOZAKI et al) 25 June 1996, col. 5, line 46 to col. 6, line 20.	1-11
A	US 5,253,247 A (HIROSE et al) 12 October 1993, abstract.	1-11
A	US 5,602,830 A (FICHOU et al) 11 February 1997, figure 1.	1-11

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*1* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 FEBRUARY 2000

Date of mailing of the international search report

14 MAR 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

HUY D. VU

Telephone No.

(703) 308-6602

**THIS PAGE BLANK (USPTO)**